

# FIRE-RATED CEILING ACCESS HATCH

18 mm - 1 x 18 mm panel  
25 mm - 2 x 12.5 mm panels

**30 MINUTES**



- Aluminium-bar frame attached by «Tox» connections
- Intumescent seal protecting against gas, smoke and flames in case of fire
- Safety pin
- Hidden latches
- Quick and easy to install
- Push-release opening
- Screwed GKF plasterboard

**18 mm** PANELS

or

**2 x 12.5mm** PANELS

30-minute fire-rated ceiling access hatches are designed to be installed in self-contained fire protection false ceilings. One of the requirements is that the «fire load is only on the room side», and the fire resistance classification is EI 30.

They offer effective protection against fire spreading in the area beneath the false ceiling. The integrated aluminium frame is fitted with a firewall. The inspection hatch cover is fitted with a DF fire-resistant panel and protected against smoke by a multi-purpose peripheral seal. The cover is secured on both sides by automatic safety mounting arms. The safety mounting arms ensure that the hatch cover is engaged each time it is opened. The cover is easy to remove and replace.

## APPLICATION SPECIFICATIONS

- Fit to the ceiling (do not walk on it).
- Customised dimensions on request, up to the maximum dimensions allowed by the report.

## CERTIFICATION

- CSTB Fire-report no. RS-20-054 + EXT 20.168 (18 mm).
- CSTB Fire-report no. RS-20-054 + EXT 20.168 (2 x 12.5 mm).

## MOUNTING AND FIXING

The integrated frame can be easily mounted into the ceiling cavity (about 5-10 mm larger than the installation dimensions).


Screw through the plasterboard ceiling and the aluminium frame using integrated dry wall screws. Affix the protective caps. Coat everything and attach the cover.



Fire resistance tested from below (room side)

**NF EN 1634-1 : +A1 : 2018**

## MOUNTING AND FIXING

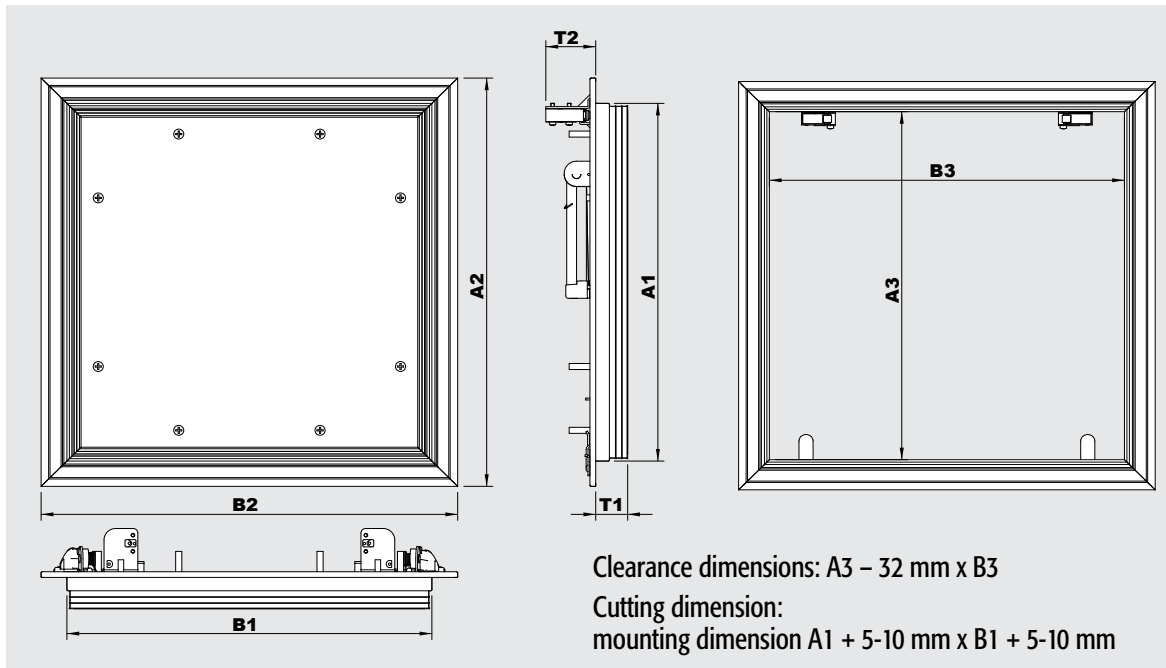

## SIZES AND REFERENCES

### 18 mm PANEL EI 30 Certificate

DIMENSIONS IN MM A x B (V)	CLEAR OPENING A1 x B1	SIZE FRAME FITTING A2 x B2	SIZE REQUIRED INTERNAL A3 x B3	WIDTH DEPTH		REFERENCE
				T1	T2	
<b>300 x 300</b>	297 x 297	339 x 339	289 x 289	19	41	A09497
<b>400 x 400*</b>	397 x 397	439 x 439	389 x 389	19	41	A09498
<b>500 x 500</b>	497 x 497	539 x 539	489 x 489	19	41	A09499
<b>600 x 600</b>	597 x 597	639 x 639	589 x 589	19	41	A09500

Dimensions in mm, (V) = closing side.

\*Access panels in stock.

Products not stocked – 3/4 weeks delivery time.

### 2 x 12,5 mm PANELS EI 30 Certificate

DIMENSIONS IN MM A x B (V)	CLEAR OPENING A1 x B1	SIZE FRAME FITTING A2 x B2	SIZE REQUIRED INTERNAL A3 x B3	WIDTH DEPTH		REFERENCE
				T1	T2	
<b>200 x 200</b>	197 x 197	239 x 239	189 x 189	26	41	A09492
<b>300 x 300</b>	297 x 297	339 x 339	289 x 289	26	41	A09493
<b>400 x 400</b>	397 x 397	439 x 439	389 x 389	26	41	A09494
<b>500 x 500</b>	497 x 497	539 x 539	489 x 489	26	41	A09495
<b>600 x 600</b>	597 x 597	639 x 639	589 x 589	26	41	A09496
<b>600 x 800</b>	597 x 797	639 x 839	589 x 789	26	41	A09506
<b>600 x 1200</b>	597 x 1197	639 x 1239	589 x 1189	26	41	A09507

Dimensions in mm, (V) = closing side.

Products not stocked – 3/4 weeks delivery time.

**All reports must be validated  
by your inspection office  
prior to any order.**

