


SOFTLINE FIRE-RATED ACCESS PANELS

WALL 60 MINUTES

CEILING 30 MINUTES



- Access to service ducts
- White paint finish RAL 9016
- Non-removable door leaf
- Built-in on left or right side
- Door leaf with fire protection
- Installation in wall partition or ceiling
- Closes with a square key



Flammability tested front and rear panels

The SOFTLINE 60-minute fire-rated inspection hatches are specially designed to be integrated into the walls of service ducts with a minimum thickness of 25 mm. They meet the requirements of fire resistance classification EI 60. They protect against fire spreading from a location within the duct.

The metal surface of the powder-coated frame conceals the aperture in the wall, giving a seamless appearance. The square key lock prevents opening by unauthorised persons.

ADVANTAGES

- A RAL 9016 coating provides anti-corrosion protection and gives a seamless appearance.
- Simple mounting using swivel wall fixings.
- Closes with a lockable square key.
- Acceptable substrates: plaster board or concrete.
- Installation in wall partition or ceiling.

APPLICATION SPECIFICATIONS

- For mounting in a wall partition or ceiling.
- Customised dimensions on request, up to the maximum dimensions allowed by the report.
- Minimum thickness of the partition: 25 mm.

CERTIFICATION

- CSTB Fire-report no. RS-19-067.


MOUNTING AND FIXING

Simple installation of the complete access panel using the mounting frame in the wall aperture (about 5-10 mm larger than the installation dimensions). Screws laterally into the wall using flexible swivel fixings.



* Standardised acoustic insulation index. NF EN ISO 10140.
Tested on a 400 x 400 mm access panel

MOUNTING AND FIXING

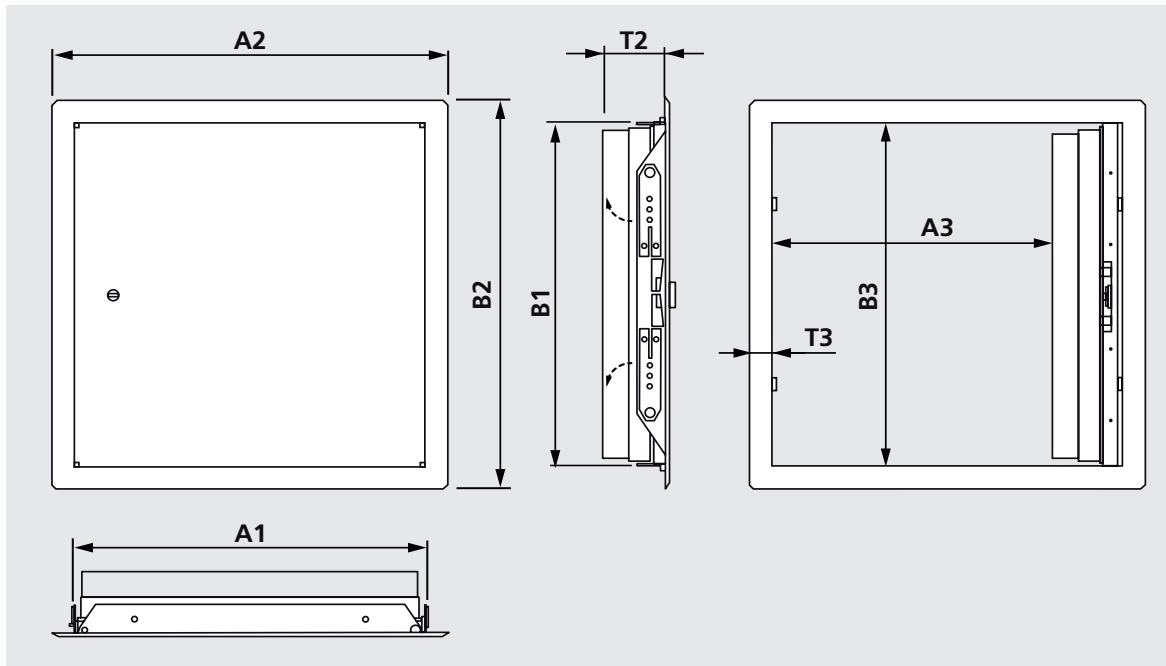

Clearance dimensions: A3 - 15 mm (from 500 x 500) x B3
 Aperture dimension: Installation dimension A1 + 5 mm x B1

SIZES AND REFERENCES

2 x 12,5 mm PANELS EI 60 Certificate

DIMENSIONS IN MM A x B (V)	CLEAR OPENING A1 x B1	SIZE FRAME FITTING A2 x B2	SIZE REQUIRED INTERNAL A3 x B3	WIDTH DEPTH		REFERENCE
				T1	T2	
200 x 200	200 x 200	235 x 235	135 x 195	53	20	A09536
300 x 300	300 x 300	335 x 335	235 x 295	53	20	A09537
400 x 400	400 x 400	435 x 435	335 x 395	53	20	A09538
500 x 500	500 x 500	538 x 538	410 x 468	53	25	A09539
600 x 600	600 x 500	638 x 638	510 x 568	53	251	A09540

Dimensions in mm, (V) = closing side.
 Products not stocked - 3/4 weeks delivery time.

**All reports must be validated
 by your inspection office
 prior to any order.**

